
JAZZ

Parts List

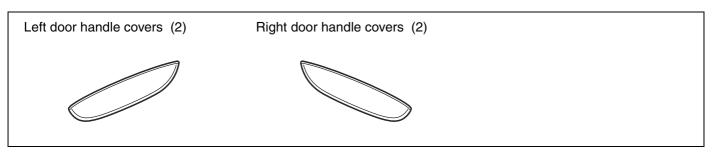

Tools and Supplies Required

Contact cleaner

· Shop towel


· Masking tape

Before You Begin

Customer Information

- These instructions show the installation of the left door handle cover. The same procedure applies to the other side.
- Do not damage the paint finish. •
- This door handle cover kit should only be installed if the ambient air temperature is 15°C (60°F) or above. •
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. •

Illustration of the Components on the Vehicle

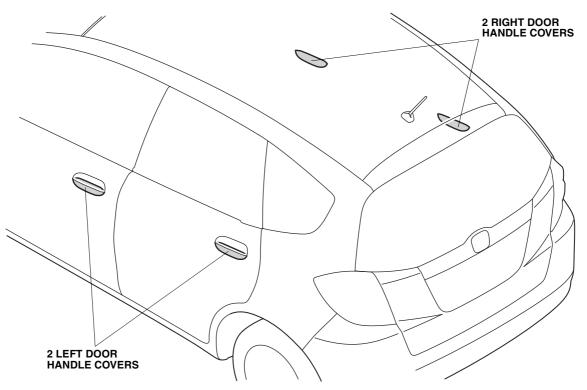


751009AR




Installation


Front Side

- 1. Check the left door handle cover installation position.
 - Move the outer handle and check that it does not interfere with the door handle cover.
- 2. Remove the two adhesive backings from the left door handle cover.
- Turn back the two adhesive backings on the backside of left door handle cover partway and temporarily attach them to the surface side of the door handle cover using two masking tapes.
- 4. Clean the surface where the left door handle cover will attach using contact cleaner.
- 5. Attach the left door handle cover to the door handle skin aligning them with each other.

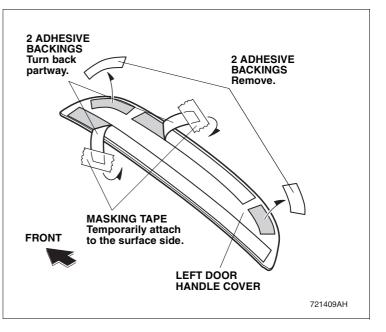

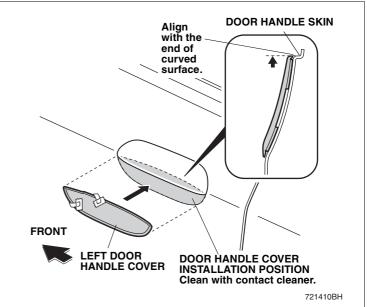

6. Pull the outer handle and return it several times to see it does not interfere with the left door handle cover.

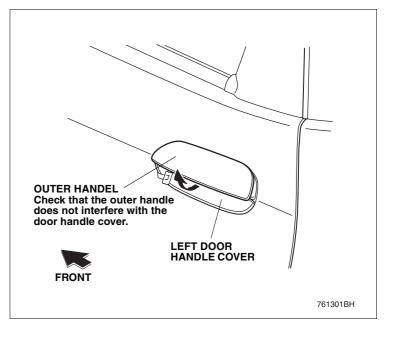

- 7. While removing the two adhesive backings, press the left door handle cover firmly with the palm of your hands for 30 seconds to adhere it securely.
- 8. Repeat the above steps on the left rear side and the right side to install the other door handle covers.

