HONDA

INSTALLATION INSTRUCTIONS

NOV. 2013

DOOR MIRROR COVERS	*CIVIC*

GENERAL VIEW

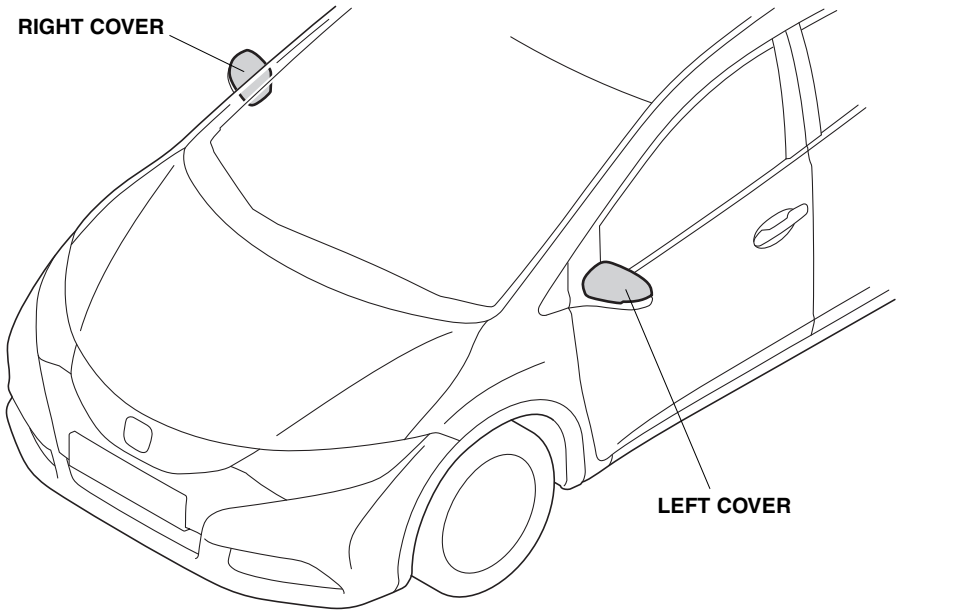

FOR YOUR SAFETY (Read carefully)

Introduction of Symbol Messages

- These symbols warn you about the possible hazards and explain how to avoid them. And give you some advices.

⚠ DANGER	You will be killed or seriously hurt if you do not follow the instructions.
⚠ WARNING	You can be killed or seriously hurt if you do not follow the instructions.
⚠ CAUTION	You can be hurt if you do not follow the instructions.
NOTICE	Gives advice to prevent damage to the product. Gives helpful information or instructions to be followed in using the product.
	Indicates prohibited actions.

© Honda Access Corp. 2013

Honda Access

Introduction of Icons

- These icons indicate the working place and the worker's vision.


The place for the vehicle.


The place for the instrument panel.

- These icons indicate the necessary things for your safety and the work.

Wear eye protection.

Wear heavy gloves.

Work with an assistant.

Place the part on a blanket.

Remove any burrs.

Use the touch-up paint and dry.

Keep the parts and give it to the customer.
(Not use)

Press firmly.

Tighten by specified torque.

Work perpendicularly.

Clean with the contact cleaner.

Wire Harness Routing Precaution



Do not clamp the accessory harness and SRS harness together.


Connect the connectors and terminals securely until they lock.


Do not pull the harness to disconnect the connectors.


Reinstall the connectors to the original positions if they are removed.


Do not pull the harness strongly.

Secure the accessory harness to the specified position, not to hang down.

Do not pinch the harness with the parts.


Cut off the excess of the wire ties.

Safety: General

- Observe all safety notes and precautions described in the Shop Manual in addition to those described in this Installation Instruction. Be extremely careful for your safety and safety of others particularly.
- Be careful not to damage the vehicle and the parts.
- Be extremely careful to the handling of the retaining tabs and clips particularly.
- Note the locations of the parts before removing them so that they can be reinstalled in their original positions properly.

Safety: For Electric Parts

- Do not perform the installation of the accessories with having connected negative cable of the battery.

Safety: For the Accessory

- Always use the parts and tools specified in the installation instructions.

PARTS LIST

Left cover



Right cover



TOOLS AND SUPPLIES REQUIRED

- Long-nose pliers
- Shop towel
- Tape
- Ratchet
- 10 mm Open end wrench
- TORX bit

INSTALLATION

Disconnecting the Battery Cable

1. Make sure that you have the anti-theft code for the audio/navigation system. Write down the customer's radio station presets. Record some settings of the vehicle if necessary.
2. Disconnect the negative cable from the battery.

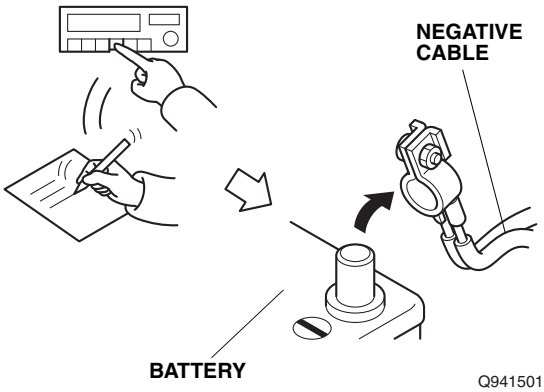

Q941501BW

Removing the Vehicle Parts

3. Insert a shop towel to protect the vehicle.

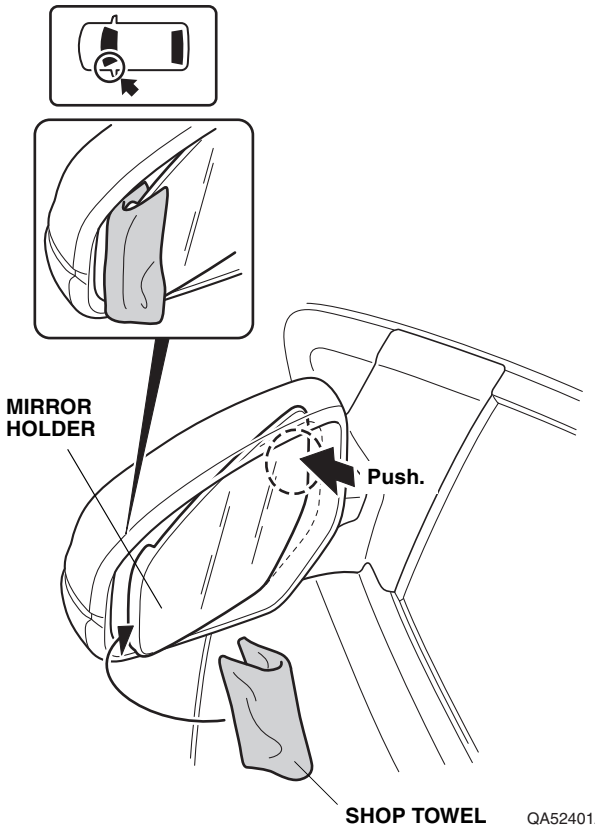

QA52401AH

4. Remove the mirror holder.

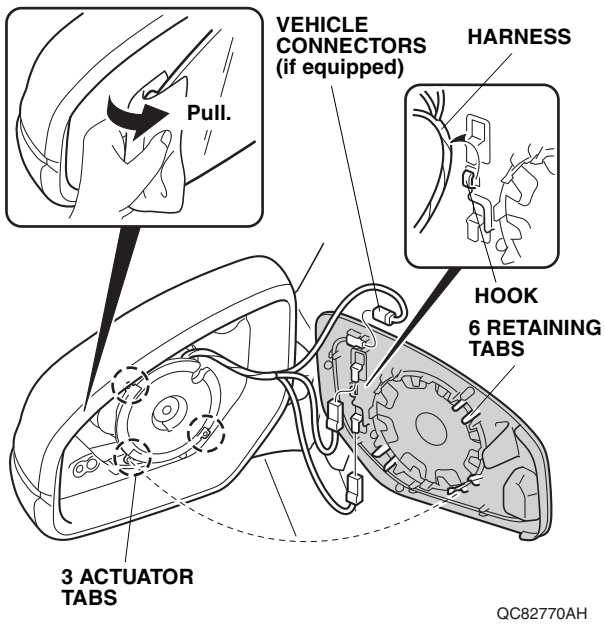

QC82770AH

5. Remove the TORX screw.

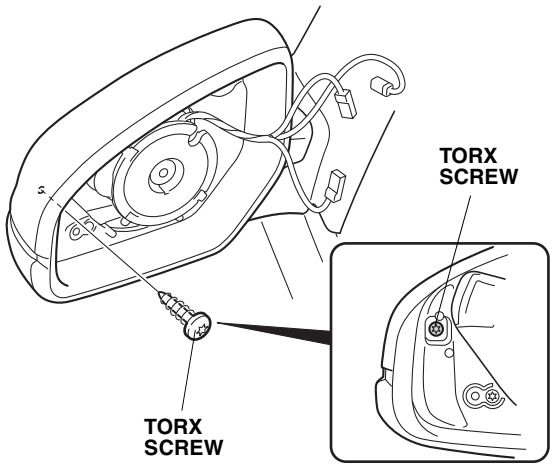

QC82771AH

6. Remove the mirror housing.

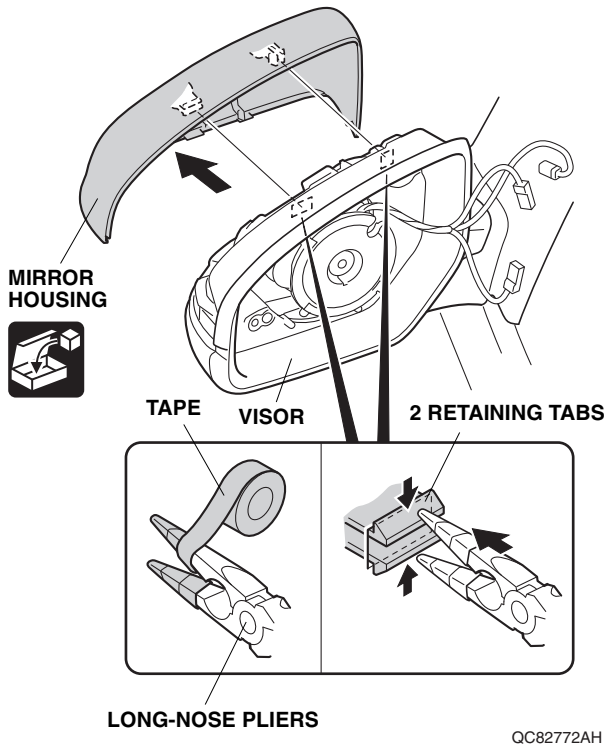

QC82772AH

Installing the Covers

7. Install the left cover.

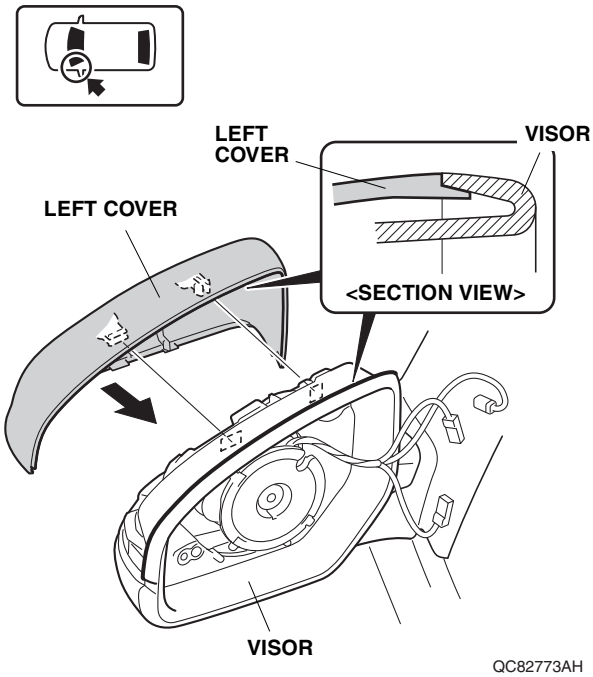

QC82773AH

8. Secure the left cover.

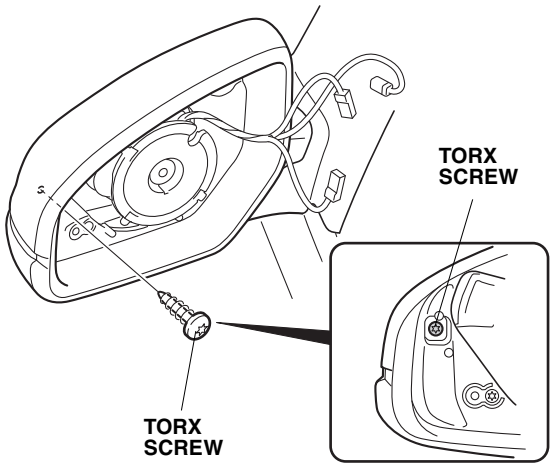

QC82771AH

9. Reinstall the mirror holder.

NOTICE

- Align the retaining tabs on the mirror holder so they line up on each side of the actuator tabs.

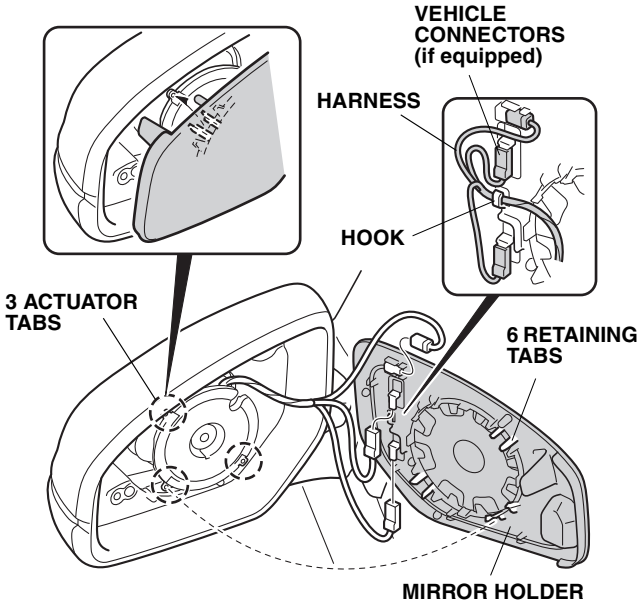

QC82774AH

10. Check the mirror holder.

NOTICE
• Move the mirror holder in all directions to check if it is installed securely.

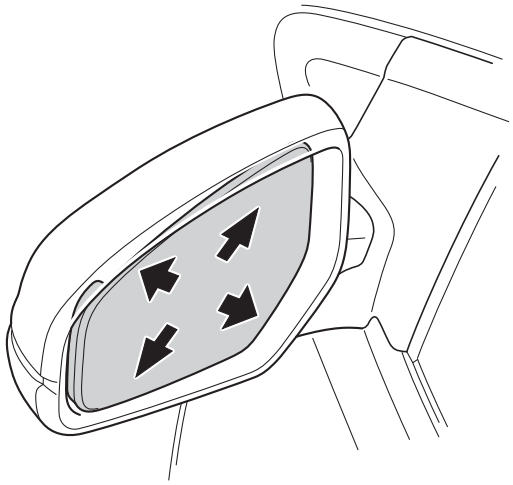

QA52407AH

11. Repeat same procedures for the other side.

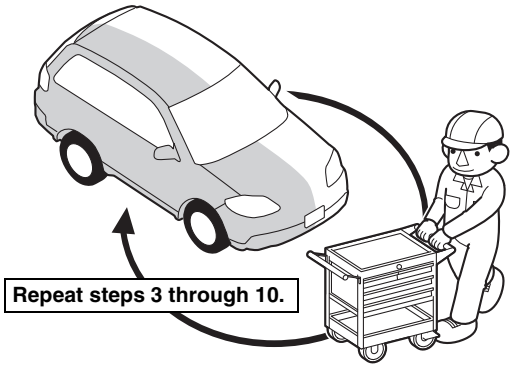

Q9D1014AM

Check After Installation

12. Check that all parts are routed and installed properly.

NOTICE
• Check that the harnesses are not pushed, not pulled and not pinched. • Check that all clamps and wire ties are installed securely.

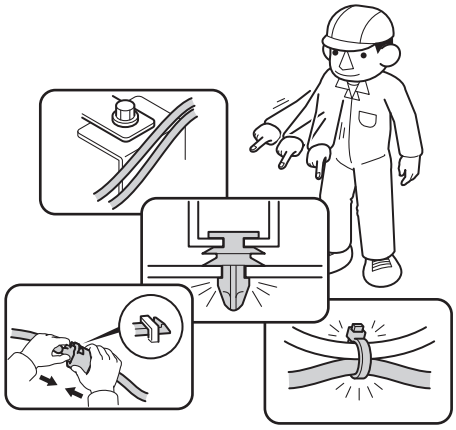

Q060706BM

Operation Check

13. Reconnect the negative cable to the battery.

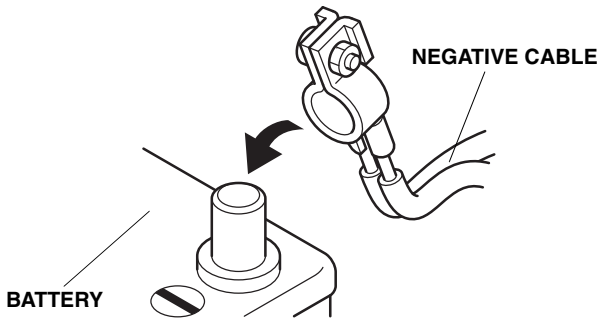

Q060702AM

14. Check that the angle adjustment and movement of the mirror operate properly.

Reinstalling the All Removed Parts

15. Check that the electric accessories and systems operate properly.
16. Press and hold the audio power button for two seconds, or enter anti-theft code for the audio/ navigation system.
17. Reset the memory of each equipment and restore the positions of those control knobs.



Q060704AM

Restoration Operations

NOTICE
• Restore the systems back to normal operation as described in the Shop Manual if necessary.